

Spring-return actuator, combined with thermoelectric tripping device BAT (72 °C), for fire and smoke dampers 90° in ventilation and air-conditioning systems, with connection plugs for simple integration in control and monitoring systems or bus networks via communication and power supply units

- Nominal Torque 4 Nm / 3 Nm
- Nominal voltage AC/DC 24 V
- Control Open-close
- Spindle driver Form fit 12x12 mm, Continuous hollow shaft


Technical data

Electrical data	Nominal voltage	AC/DC 24 V
	Nominal voltage frequency	50/60 Hz
	Nominal voltage range	AC 19.2...28.8 V / DC 21.6...28.8 V
	Power consumption in operation	2.5 W
	Power consumption in rest position	0.8 W
	Power consumption for wire sizing	4 VA
	Power consumption for wire sizing note	I _{max} 8.3 A @ 5 ms
	Auxiliary switch	2 x SPDT
	Switching capacity auxiliary switch	1 mA...3 (0.5 inductive) A, AC 250 V
	Switching points auxiliary switch	5° / 80°
	Connection supply / control	Cable 1 m, 2 x 0.75 mm ² (halogen-free)
	Connection auxiliary switch	Cable 1 m, 6 x 0.75 mm ² (halogen-free)
	Connection plug	Supply / control: 3-pole plug, suitable for communication and power supply units (see "Accessories") Auxiliary switch: 6-pole plug, suitable for communication and power supply units (see "Accessories")
		Cable length thermoelectric tripping device
Functional data	Torque motor	Min. 4 Nm
	Torque spring return	Min. 3 Nm
	Direction of rotation motor	Can be selected by mounting L/R
	Manual override	With position stop
	Angle of rotation	Max. 95°
	Running time motor	<60 s / 90°
	Running time spring-return	20 s @ -10...55 °C / <60 s @ -30...-10 °C
	Sound power level motor	<43 dB(A)
	Sound power level spring-return	<62 dB(A)
	Spindle driver	Form fit 12x12 mm, Continuous hollow shaft
	Position indication	Mechanically, with pointer
Service life	Min. 60,000 safety positions	
Safety	Response temperature thermal fuse	Duct outside temperature 72 °C Duct inside temperature 72 °C
	Protection class IEC/EN	III Safety extra-low voltage
	Protection class auxiliary switch IEC/EN	II Protective insulated
	Degree of protection IEC/EN	IP54 in all mounting positions
	EMC	CE according to 2014/30/EU
	Low voltage directive	CE according to 2014/35/EU
	Certification IEC/EN	IEC/EN 60730-1 and IEC/EN 60730-2-14
	Mode of operation	Type 1.AA.B
	Rated impulse voltage supply / control	0.8 kV
	Control pollution degree	3
	Ambient temperature normal operation	-30...55 °C
	Ambient temperature safety operation	The safety position will be attained up to max. 75 °C
	Non-operating temperature	-40...55 °C
	Ambient humidity	95% r.h., non-condensing

Technical data

Safety	Maintenance	Maintenance-free
Weight	Weight	1.2 kg

Safety notes



- The device must not be used outside the specified field of application, especially not in aircraft or in any other airborne means of transport.
- The actuator is adapted and installed on the fire and smoke damper by the damper manufacturer. For this reason, the actuator is only supplied directly to safety damper manufacturers. The manufacturer then bears full responsibility for the proper functioning of the damper.
- The two switches integrated in the actuator are to be operated either on power supply voltage or at safety extra-low voltage. The combination power supply voltage/safety extra-low voltage is not permitted.
- Cables must not be removed from the device.
- The device may only be opened at the manufacturer's site. It does not contain any parts that can be replaced or repaired by the user.
- The device contains electrical and electronic components and must not be disposed of as household refuse. All locally valid regulations and requirements must be observed.

Product features

Mode of operation	The actuator moves the damper to the operating position at the same time as tensioning the return spring. The damper is turned back to the safety position by spring energy when the supply voltage is interrupted.
Safety Position Lock	The Safety Position Lock™ reliably holds the fire damper in the safety position in case of fire therefor ensuring maximum safety. The technical solution for this function of the BFL and BFN actuators has a patent pending.
Thermoelectric tripping device	Complies with the specific requirements of the standard ISO 10294-4. BAT: If the ambient temperature of 72°C is exceeded, then the duct outside temperature fuse will respond. If the duct inside temperature of 72°C is exceeded, then the duct inside temperature fuse will respond. When one of the thermal fuses responds, the supply voltage is interrupted permanently and irreversibly. The LED is on when <ul style="list-style-type: none"> - supply voltage is available - the thermal fuses are OK and - the test switch is not pressed. Note: The function of the thermal fuses and the control key is only warranted if the actuator is connected to the supply voltage (LED on).
Signalling	Two microswitches with fixed settings are installed in the actuator for indicating the damper end positions. The electrical contacts of these microswitches are equipped with a gold/silver coating that permits integration both in circuits with low currents (mA range) and in ones with larger-sized currents (A range) in accordance with the specifications in the data sheet. It should be noted with this application however that the contacts can no longer be used in the milliampere range after larger currents have been applied to them, even if this has taken place only once. The position of the damper blade can be read off on a mechanical position indication.
Manual operation	Without power supply, the actuator can be operated manually and fixed in any required position. It can be unlocked manually or automatically by applying the supply voltage.
Standards / regulations	The design of the actuator is based on the specific requirements from the European standards: <ul style="list-style-type: none"> - EN 15650 Ventilation for buildings – Fire dampers - EN 1366-2 Fire resistance tests on service installations (Part 2: Fire dampers) - EN 13501-3 Fire classification of construction products and building elements (Part 3: Classification using data from fire resistance tests on products and elements used in building service installations: fire resisting ducts and fire dampers)

Product features

Recommendation for application Regular operational checks (open-close control of the fire damper) enhance the safety of people, animals, property and the environment. Unless other requirements are stipulated – e. g. in the damper manufacturer's operating instructions – Belimo recommends the performance of monthly operational checks. Fire damper actuators from Belimo are designed in accordance with service life specifications contained in the technical data sheet for regular operational checks. Notes for regular operational checks can be found in the European Product Standard for Fire Dampers (EN 15650) under "Maintenance information".

Connection The actuator is equipped with connection plugs. This means that it can be integrated via communication and power supply units (see «Accessories») in the control and monitoring systems (e.g. SBS-Control) or in bus networks (e.g. MP-Bus or Ringbus solutions).

Connection plug



Delivery notes Incl. Hand crank, Pointer, Protective bag, Form fit insert 12/10 mm

Accessories

	Description	Type
Electrical accessories	Communication and power supply unit for integration in SBS-Control networks	BKN230-24
	Communication and power supply unit for integration in SBS-Control and MP bus networks	BKN230-24-C-MP
	Communication and power supply unit for integration in Modbus networks	BKN230-24-MOD
	Auxiliary switch 2 x SPDT	SN2-C7
	Blanking cover for BAT (without thermal fuse for duct inside temperature)	ZBAT0
	Spare tripping element for BAT, duct inside temperature = 72 °C, sensor length = 65 mm	ZBAT72
	Spare tripping element for BAT, duct inside temperature = 72 °C, sensor length = 90 mm	ZBAT72/9
	Spare tripping element for BAT, duct inside temperature = 95 °C, sensor length = 65 mm	ZBAT95
	Spare tripping element for BAT, duct inside temperature = 95 °C, sensor length = 65 mm (20 pcs.)	ZBAT95.1
	Spare tripping element for BAT, duct inside temperature = 95 °C, sensor length = 90 mm	ZBAT95/9
	Spare tripping element for BAT, duct inside temperature = 120 °C, sensor length = 65 mm	ZBAT120
	Description	Type
Mechanical accessories	Bracket for auxiliary switch (SN2-C7) for BFL, BFN	ZSN-B

Electrical installation




Notes

- Connection via safety isolating transformer.
- Parallel connection of other actuators possible. Observe the performance data.
- Combination of power supply voltage and safety extra-low voltage not permitted at the both auxiliary switches.

Electrical installation

Wiring diagrams

AC/DC 24 V, open-close

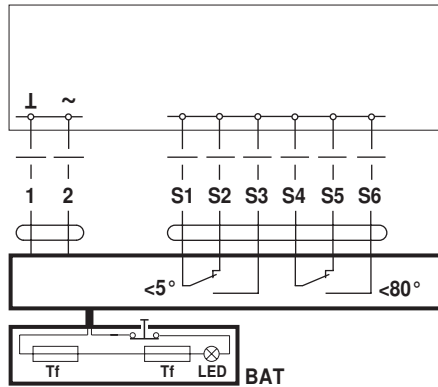

Plug connection to communication and power supply units:

Application examples for integration into monitoring and control systems or into bus networks can be found in the documentation of the connected communication and power supply unit (see "Accessories").

Dimensions [mm]

Dimensional drawings

