



Bağlantı / Connection	İçten Dişli / British Standard Treaded
Akış Kontrol / Flow Kontrol	Açma - Kapama / Open - Close
Tork / Torque	4Nm
Çalışma Süre / Workin Time	Aç/Open : 15s Kapa/Close : 15s
Çalışma Ortamı / Work Condition	2 ~ 80 °C
Vana Gövdesi / Valve Body	Dövme Prinç / Forged Brass
Motor Tipi / Actuator Type	AC24V / AC230V, 50/60Hz, IP65
Vana Çapları / Valve Sizes	2-3 yollu / way, DN15, DN20, DN25, DN32

Özellikler

Features

HCY / HCN serisi elektrikli küresel zon vanaları, pirinç gövde küresel vana ve On/Off kontrol motordan oluşmaktadır ve su sisteminde yaygın olarak kullanılmaktadır. Vana, 90 ° döndürme için senkron motorla çalıştırılmaktadır, vana tamamen açıkken motor enerjisi kesilir ya da tamamen kapalıyken enerji kesilir.







HCY / HCN series electric ball valves are widely used in On/Off water system, which is consist of brass ball valve and actuator , valve is driven by synchronous motor to rotate 90°, built-in limited contactto quarantee power off when valve fully open or fully close.

Teknik Veri

Technical Data

Motorlu Vana Motorized Valve	Çap Size	Tip Type	Debi Flow	Kapatma Basıncı Shut Off Pressure	Basınç Pressure	Enerji Besleme Power Supply
HCY-2015	DN15 (G1/2)	2 yollu / way	4.62 KVS	Max. 1 MPa (9bar)	Max. 2 MPa (20bar)	AC220V 50/60Hz 6.5W
HCY-3015		3 yollu / way				
HCY-2020	DN20 (G3/4)	2 yollu / way	7.5 KVS			
HCY-3020		3 yollu / way				
HCY-2025	DN25 (G1)	2 yollu / way	13.02 KVS			
HCY-3025		3 yollu / way				
HCY-2032	DN32 (G1 1/4)	2 yollu / way	19 KVS			
HCN-2015	DN15 (G1/2)	2 yollu / way	4.62 KVS			AC24V 50/60Hz 6.5W
HCN-3015		3 yollu / way				
HCN-2020	DN20 (G3/4)	2 yollu / way	7.5 KVS			
HCN-3020		3 yollu / way				
HCN-2025	DN25 (G1)	2 yollu / way	13.02 KVS			
HCN-3025		3 yollu / way				
HCN-2032	DN32 (G1 1/4)	2 yollu / way	19 KVS			

Motor Actuator	Kontrol Control	Motor Gücü Actuator Tork	Yardımcı Kontak Aux. Switch	Koruma Protection	Enerji Besleme Power Supply
HCY-A	On / Off Kontrol / On/Off Control	4Nm	Hayır / No	IP65	AC220V 50/60Hz 6.5W
HCY-A-3P	Yüzer Kontrol / Floating Control		Evet / Yes		
HCY-A-5P	On / Off Kontrol / On/Off Control		Hayır / No		
HCN-A	Yüzer Kontrol / Floating Control		AC24V		

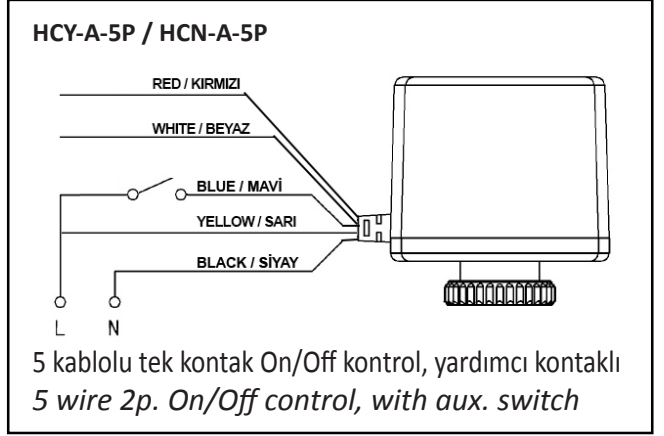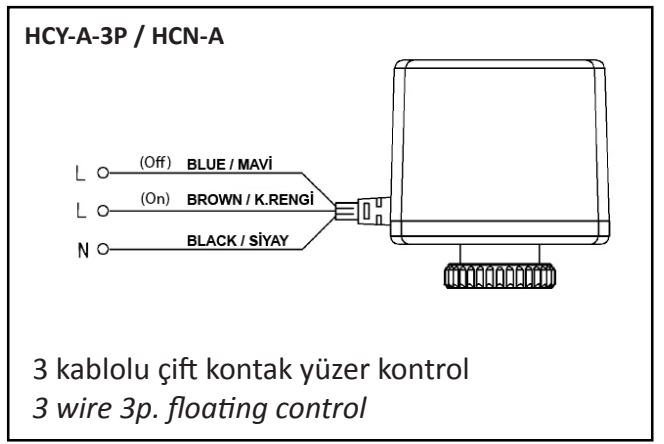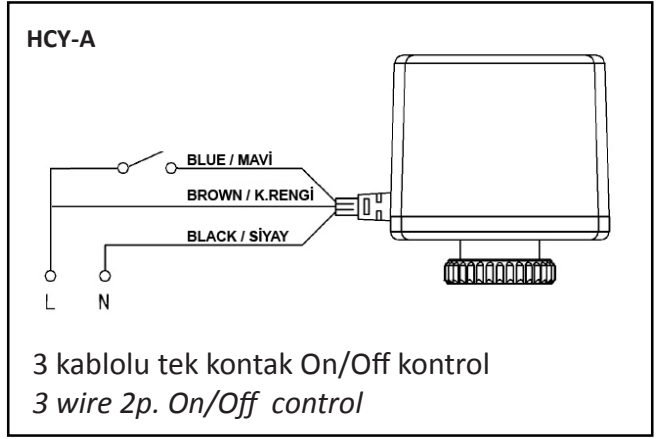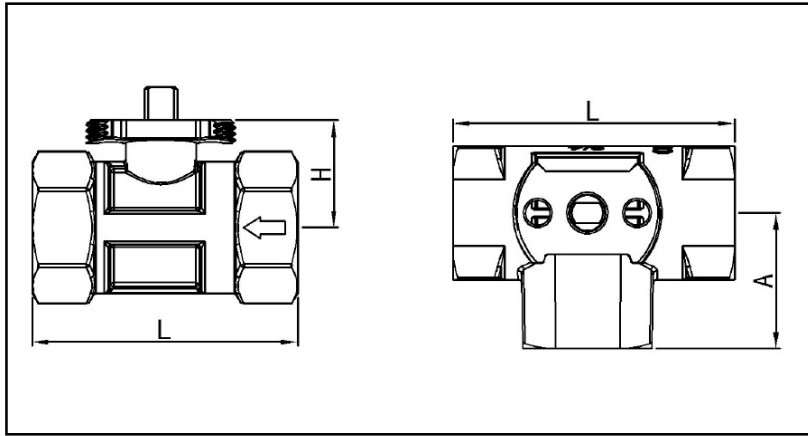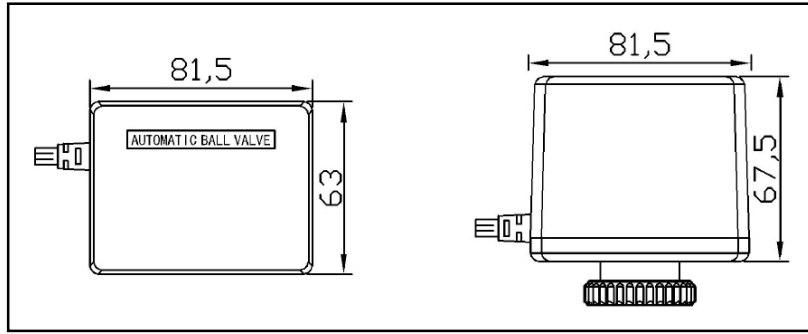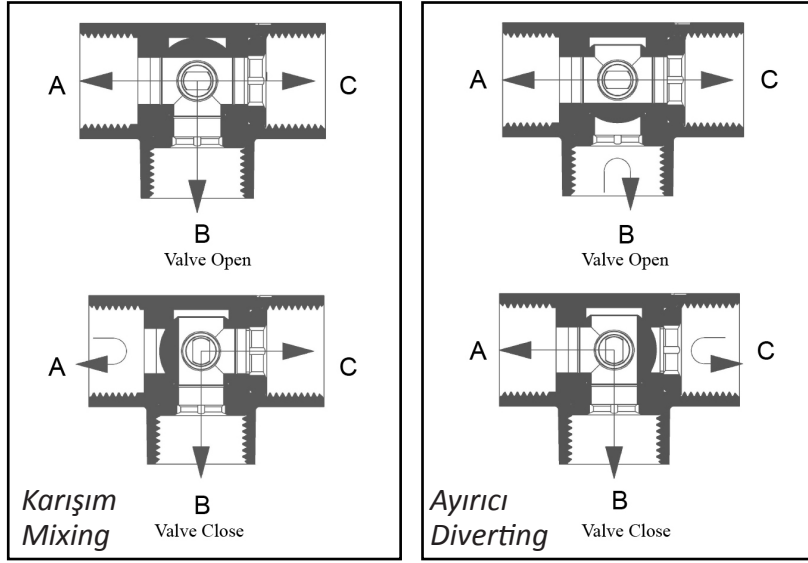

Çap Size	Tip Type	L	H	A	Bore Size
DN15 (G1/2)	2 yollu / way	63	26	-	12
	3 yollu / way	63	26	30	12
DN20 (G3/4)	2 yollu / way	63	26	-	12
	3 yollu / way	68	26	33	12
DN25 (G1)	2 yollu / way	73	32	-	16
	3 yollu / way	73	34	42	20
DN32 (G1 1/4)	2 yollu / way	83	36	-	20