

MODEL	DISPLAY	SENSORS		
		TEMPERATURE	CO ₂	HUMIDITY
TP-B/W*		•		
TP-C-B/W*		•	•	
TP-H-B/W*		•		•
TP-HC-B/W*		•	•	•
TP-DISP-B/W*	•	•		
TP-C-DISP-B/W*	•	•	•	
TP-H-DISP-B/W*	•	•		•
TP-HC-DISP-B/W*	•	•	•	•



*B/W: all panels are available in black or white, which is reflected in the last letter of the product code, e.g., TP-DISP-H-B or TP-C-W.

APPLICATION AND USE

The Touch Point is a modern comfort management wall panel with two most popular open communication protocols: Modbus RTU/ASCII and BACnet MS/TP. The Touch Point is available in different configurations of sensors (temperature, CO₂, and humidity), colors, versions with or without display, and touch buttons. The panel can be configured using the iSMA Configurator software or Modbus registers/BACnet objects. It fits most of standard junction boxes in Europe and can easily be installed using a wall back box.

FEATURES

- Modern and smart design
- Intuitive management
- Ease of installation and configuration
- Multiprotocol interface
- Ultimate flexibility
- Free software: iSMA Tool & iSMA Configurator
- Five touch function buttons
- RS485 interface
- Modbus RTU/ASCII and BACnet MS/TP
- Temperature sensor as a standard, humidity and CO₂ sensors as an option
- USB type C interface
- DIP switches for configuration
- Buzzer
- Navigation RGB LED

TECHNICAL CHARACTERISTICS




DESCRIPTION		TP
Power supply	Voltage	20-34 V DC
		24 V AC ± 20%
Built-in sensors	Temperature sensor	10k NTC type, accuracy: ± 0.5°C, resolution: ± 0.1°C
	Humidity sensor (applies to version with humidity sensor)	Range: 0-100% RH, accuracy: ± 2% RH in range 10-90% RH, resolution: ± 0.1%
	CO ₂ sensor (applies to version with CO ₂ sensor)	Range: 400-4000 ppm, accuracy: ± 30 ppm
COM1	RS485 interface	Up to 128 devices Half-duplex
	Communication protocols	Modbus RTU/ ASCII, BACnet MS/TP
	Ports	2 RJ45 + screw connector
	Baud rate	4800-115200
USB1	USB 2.0	USB type C

The performances stated in this sheet can be modified without any prior notice.


DESCRIPTION		TP	
Front panel	Surface	White/black glass	
	Display (applies to version with display)	TFT 0.96"	
	Backlight	3 intensity modes	
	Buttons	5	
	LED		3 blue and 3 red for temperature
			3 white for fan
		1 white for occupancy	
		1 configurable RGB	
Ingress protection	IP rating	IP20 for indoor installation	
Temperature	Operating	From 0°C to +40°C	
	Storage	From -40°C to +70°C	
Humidity	Relative	From 5% to 95% RH (without condensation)	
Screw connector	Type	Removable screw terminals	
	Maximum cable size	1.5 mm ² (24...16 AWG)	
Housing	Material	Plastic, self-extinguishing ABS	
	Mounting	Standard 60 mm wall back box	
Dimensions	Width	86 mm/3.39 in	
	Length	86 mm/3.39 in	
	Height	14.5 mm/0.57 in	

WIRING DIAGRAMS


Power Supply

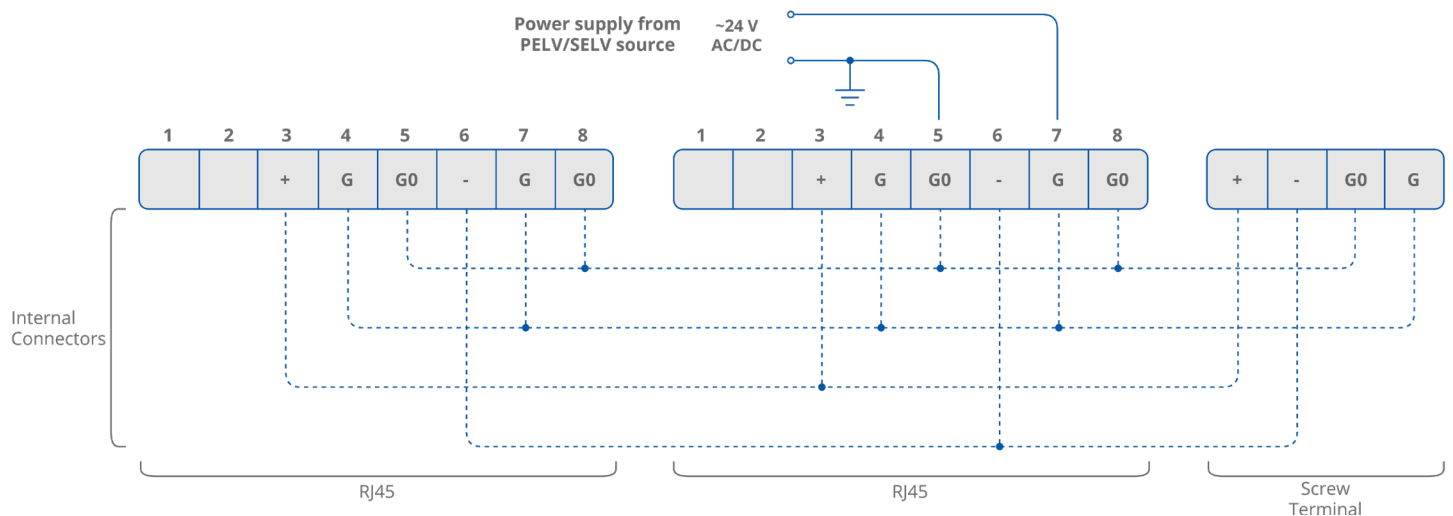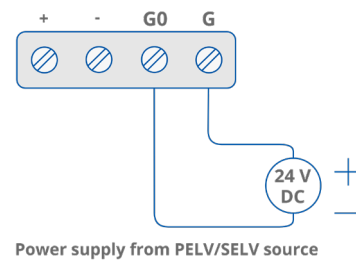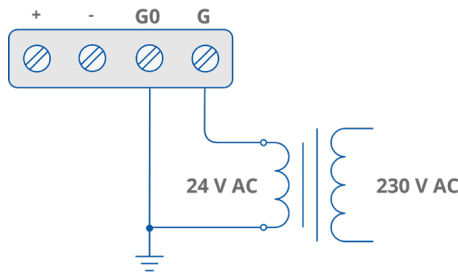

Communication

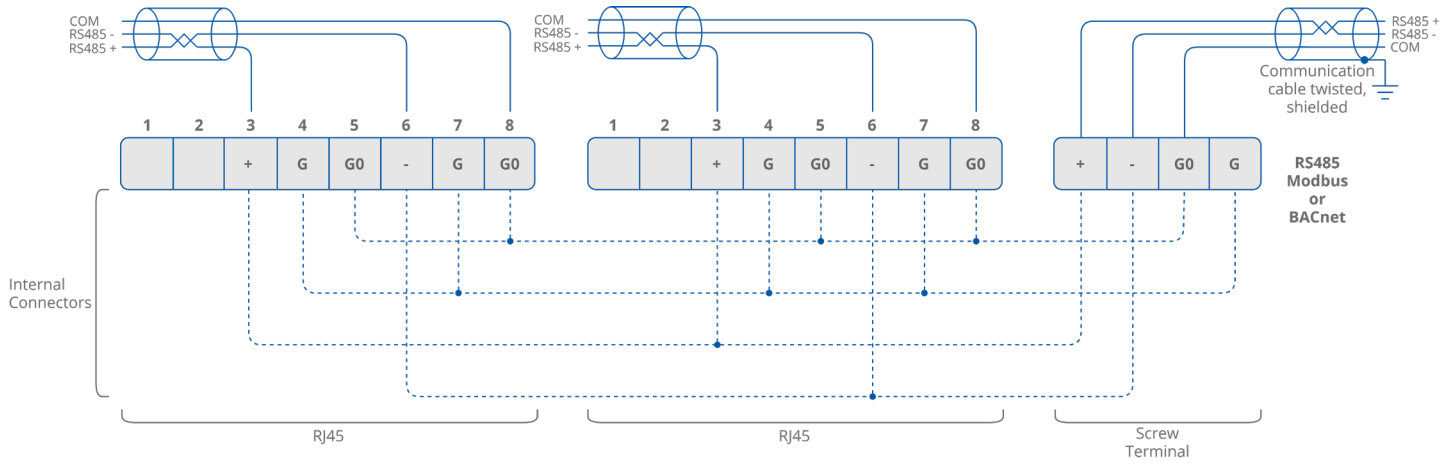

APPLICATION EXAMPLE

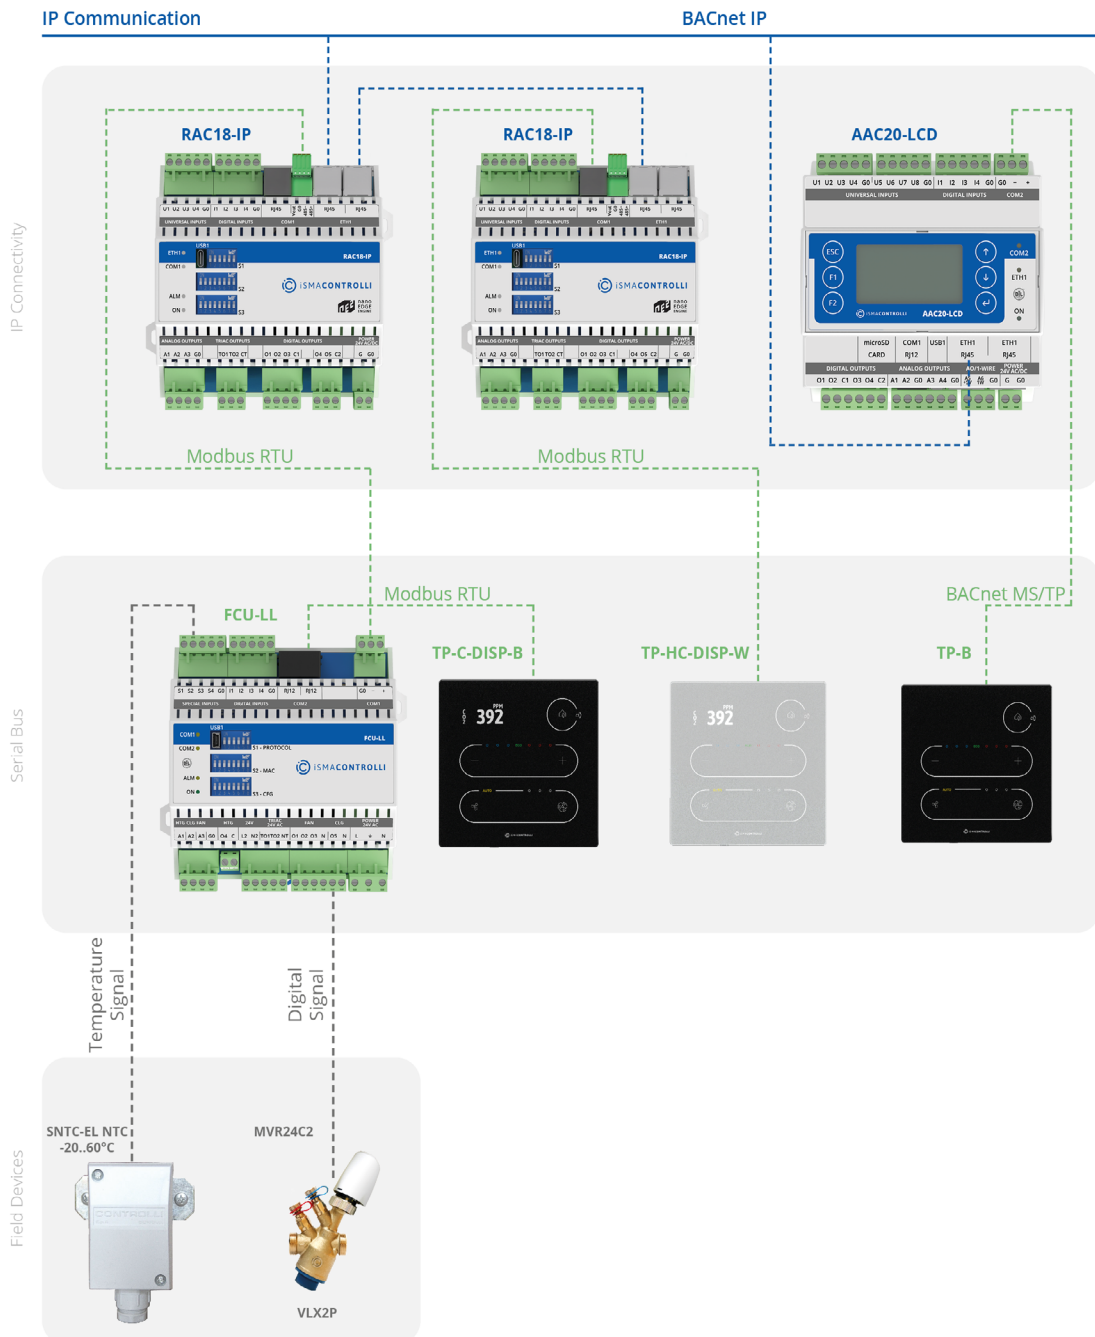

DIMENSIONS [mm]

