

Blanked flange (DIN 2527) PN16


Type overview

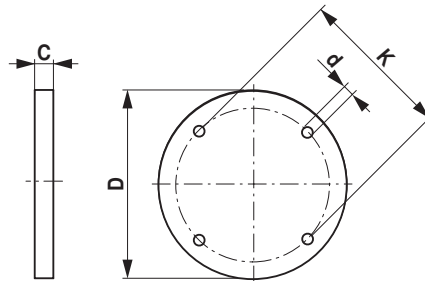
Type	DN []
ZH715	15
ZH720	20
ZH725	25
ZH732	32
ZH740	40
ZH750	50
ZH765	65
ZH780	80
ZH7100	100
ZH7125	125
ZH7150	150

Safety notes


- This accessory has been designed for use in stationary heating, ventilation and air conditioning systems and must not be used outside the specified field of application, especially in aircraft or in any other airborne means of transport.
- Only authorised specialists may carry out installation. All applicable legal or institutional installation regulations must be complied during installation.
- The accessory may not be disposed of as household refuse. All locally valid regulations and requirements must be observed.

General notes

Delivery notes In the ZH7.. scope of delivery: blanked flange, Sk screws with nut, gasket

Dimensions / Weight
Dimensional drawings


Type	DN []	C [mm]	D [mm]	d [mm]	K [mm]	Weight [kg]
ZH715	15	14	95	4 x 14	65	1.2
ZH720	20	16	105	4 x 14	75	1.5
ZH725	25	16	115	4 x 14	85	1.7
ZH732	32	16	140	4 x 18	100	2.4
ZH740	40	16	150	4 x 18	110	2.7
ZH750	50	18	165	4 x 18	125	3.6

Dimensions / Weight

Type	DN []	C [mm]	D [mm]	d [mm]	K [mm]	Weight [kg]
ZH765	65	18	185	4 x 18	145	4.2
ZH780	80	20	200	8 x 18	160	5.6
ZH7100	100	20	220	8 x 18	180	7.0
ZH7125	125	22	250	8 x 18	210	9.1
ZH7150	150	22	285	8 x 22	240	13