

Technical data sheet

LRC24A-SZ

Modulating rotary actuator for ball valves

- Torque motor 5 Nm
- Nominal voltage AC/DC 24 V
- Control modulating 0.5...10 V
- Position feedback 0.5...10 V
- Running time motor 35 s



Technical data

Electrical data	Nominal voltage	AC/DC 24 V
	Nominal voltage frequency	50/60 Hz
	Nominal voltage range	AC 19.228.8 V / DC 19.228.8 V
	Power consumption in operation	1.5 W
	Power consumption in rest position	0.4 W
	Power consumption for wire sizing	3 VA
	Connection supply / control	Cable 1 m, 4 x 0.75 mm ²
	Parallel operation	Yes (note the performance data)
Functional data	Torque motor	5 Nm
	Operating range Y	0.510 V
	Input Impedance	100 kΩ
	Position feedback U	0.510 V
	Position feedback U note	Max. 1 mA
	Position accuracy	±5%
	Manual override	with push-button, can be locked
	Running time motor	35 s / 90°
	Sound power level, motor	55 dB(A)
	Position indication	Mechanically, pluggable
Safety	Protection class IEC/EN	III Safety Extra-Low Voltage (SELV)
	Protection class UL	UL Class 2 Supply
	Degree of protection IEC/EN	IP54
	Degree of protection NEMA/UL	NEMA 2
	Enclosure	UL Enclosure Type 2
	EMC	CE according to 2014/30/EU
	Certification IEC/EN	IEC/EN 60730-1 and IEC/EN 60730-2-14
	Certification UL	cULus according to UL60730-1A, UL60730-2- 14 and CAN/CSA E60730-1:02
	Certification UL note	The UL marking on the actuator depends on the production site, the device is UL-compliant in any case
	Mode of operation	Type 1
	Rated impulse voltage supply / control	0.8 kV
	Control pollution degree	3
	Ambient temperature	-3050°C
	Storage temperature	-4080°C
	Ambient humidity	Max. 95% r.H., non-condensing
	Servicing	maintenance-free
Weight	Weight	0.44 kg



Electrical accessories	Auxiliary switch 1 x SPDT add-on	S1A
	Description	Туре
Accessories		
<u>g</u>	when the end stop is reached.	
High functional reliability		
Adjustable angle of rotation		
Manual override	Manual override with push-button possible (the ge button is pressed or remains locked).	ar is disengaged for as long as the
Simple direct mounting	Simple direct mounting Straightforward direct mounting on the ball valve with only one central screw assembly tool is integrated in the plug-in position indication. The mounting or in relation to the ball valve can be selected in 90° steps.	
Mode of operation	The actuator is connected with a standard modulating signal of 010 V and drives to the position defined by the positioning signal. Measuring voltage U serves for the electrical display of the valve position 0.5100% and as slave control signal for othe actuators.	
Product features		
	 The device contains electrical and electronic cor of as household refuse. All locally valid regulatio observed. 	
	Cables must not be removed from the device.	
	 The device may only be opened at the manufact parts that can be replaced or repaired by the use 	
	 The switch for changing the direction of rotation specialists. The direction of rotation must not in protection circuit. 	
	 Only authorised specialists may carry out installation regulations must be com 	
	 Outdoor application: only possible in case that n or aggressive gases interfere directly with the ac ambient conditions remain at any time within the sheet. 	ctuator and that is ensured that the
$\underline{\wedge}$	 This device has been designed for use in station conditioning systems and must not be used outs especially in aircraft or in any other airborne mean 	side the specified field of application

	Description	гуре	
Electrical accessories	Auxiliary switch 1 x SPDT add-on	S1A	
	Auxiliary switch 2 x SPDT add-on	S2A	
	Feedback potentiometer 140 Ω add-on	P140A	
	Feedback potentiometer 200 Ω add-on	P200A	
	Feedback potentiometer 500 Ω add-on	P500A	
	Feedback potentiometer 1 k Ω add-on	P1000A	
	Feedback potentiometer 2.8 kΩ add-on	P2800A	
	Feedback potentiometer 5 k Ω add-on	P5000A	
	Feedback potentiometer 10 k Ω add-on	P10000A	
Electrical installation			
Notes	 Connection via safety isolating transformer. Parallel connection of other actuators possible. Observe the performance data. Direction of rotation switch is covered. Factory setting: Direction of rotation Y2. 		




Electrical installation

Wiring diagrams


AC/DC 24 V, modulating

Override control (frost protection circuit)





Cable colours: 1 = black 2 = red


3 = white 5 = orange



Dimensions [mm]



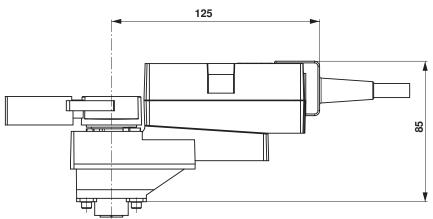

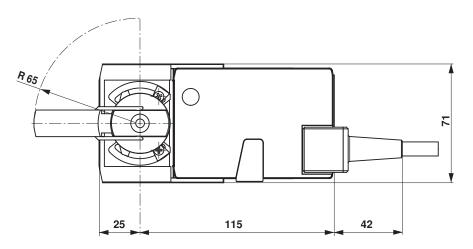

Further documentation

- The complete product range for water applications
- Data sheets for ball valves
- · Installation instructions for actuators and/or ball valves
- General notes for project planning