

# **Globe Valves Actuators**

MODEL	FORCE [N]	POWER SUPPLY	DESCRIPTION
MVE522	2200	24 V AC/DC	Long yoke, modulating/ floating control
MVE522S	2200	24 V AC/DC	Short yoke, modulating/ floating control



#### **APPLICATION AND USE**

MVE522 is a flexible electro mechanical actuator for the control of two and three-way globe valves in:

- · heating and cooling systems;
- · Air Handling Units;
- · district heating plants;
- · industrial temperature control systems.

The actuator can be controlled either by a proportional (modulating) signal or by an increase/decrease (Floating) signal.

It is easy to mount and connect the actuator. Direct mounting is possible to any iSMA CONTROLLI flanged valve. Linkage kits are available for iSMA CONTROLLI threaded valves as well as for valves of other manufacturers (table p. 3). The actuator has a fine resolution (500 steps on the full stroke range) for exacting fluid control and it is able to self-calibrate on a different stroke without the need of any user action (this function is DIP switch selectable on the field).

MVE522 has intelligent behaviour and alarm functionality in case of unexpected operation, feedback of alarms to the user is provided by LEDs (GREEN and RED) on the control board.

N.B.: Do not use the actuator if not coupled with its relating valve.

## **TECHNICAL CHARACTERISTICS**

DESCRIPTION		MVE522 MVE522S	
Supp	oly voltage L1 Ln	AC: 24 VAC ±20% 50-60 Hz DC: 22-30 V DC (Reference Ln)	
Power coi	nsumption (running)	25 VA/10 W	
Power co	nsumption (holding)	10 VA/4 W	
Dunning time	Modulating	60 s	
Running time	Floating	60 S	
Trans	former Size [VA]	50	
Stroke		5-60 mm (limited to 30 mm for MVE.S)	
Force		2200 N	
Duty cycle		Max 50%/60 minutes	
Analogue input Y M		Voltage 0-10 V DC - impedance > 100 kΩ (range: 0-10 V DC, 2-10 V DC, 0-5/2-6 V DC, 5-10/6-10 V DC) 500 Ω (range 4-20 mA)	
Digital inputs Y1 Y2		Connection to L1 or Ln when powered in AC Connection to Ln only when powered in DC	

The performances stated in this sheet can be modified without any prior notice.



DESCRIPTION	MVE522 MVE522S
Output V+	Voltage 16 V DC ± 0,5 V DC
Output V+	Max load 25 mA,
Output II	Voltage 2-10 V DC (0-100%)
Output U	Max load 2mA
Number of cycles of manual action	6.000
Number of cycles of automatic action	100.000
Type of action	Type 1
Type of movement	Linear
Room temperature	Operation -10°C to 55°C; storage -20°C to 55°C
Room Humidity	Max 90% R.H.
Protection degree	Nema 2 (*) / IP54 (**)
Insulation class	
Printed Circuit Board	FR4 (material) PLC (Performance Level Categories) = 3 PTI (Proof Tracking Index) = 175 - 249 V CTI (Comparative Tracking Index) = PTI Pollution Degree = 2
Standard	Emission/Immunity EMC 2014/30/UE according to EN 61326-1:2013 standard
Material	Housing: aluminium - cover: ABS plastic
Colour	Aluminium / white
Weight [kg]	1,7 (MVE5xx); 1,6 (MVE5xxS)
Date code	yy/ww

#### \* To guarantee IP54 protection:

Insert the actuator cable in the PG13,5 cable gland (not supplied)

# **OPERATION**

The actuator translates the control signal (modulating or 3 point floating) from the controller into a valve position. A modern brushless DC motor in the actuator drive a gear train and a worm gear – screw jack mechanism convert the motor revolutions into accurate and repeatable linear movements.

## **Control Signal**

MVE522 can be controlled by one of 2 main control types:

- 3 point floating;
- Modulating (or proportional) signal with filed selectable range (e.g., 0-10 V DC, 2-10 V DC, 0-5/2-6 V DC, 5-10/6-10 V DC and 4-20 mA).

#### **Manual Override**

There is a manual operation handle on the actuator. When it is lowered (manual override ON), the power supply to the motor power stage circuitry is cut and the motor stops. The actuator can be operated manually and the valve positioned accordingly.

The manual override lever stays in position until it is raised again, then board and motor will be powered again. At the end of this operation the actuator moves to initial position (on the basis of DIP n. 1 setting) then it follows the control signal. When the manual override is engaged the GREEN and the RED LED are ON.

Manual operation handle can also be used to modify any DIP switch setting or as re-set function after any alarm occurrence. The actuator is supplied with the manual override lowered (ON). It is not necessary to remove power supply to modify DIP switches setting.

# **Feedback Position**

The actuator utilizes a 2-10 V DC position feedback (look at DIP n. 1 setting).

#### Calibration


The actuator has both auto and manual stroke calibration, DIP n. 7. In factory delivery the auto stroke calibration is enabled – manual calibration is not necessary unless maintenance is required on the valve or certain alarm functions are desired.



### **End Point Auxiliary Switches (accessory DMVE)**

End point switches change over when the valve is fully open or closed. They are free contacts with 24V AC/DC, 4 A max voltage on terminals. End point switches can be utilized to indicate valve stroke end positions and for relay control of additional plant equipment. When the actuators are controlled individually or in sequence, it is possible to use the end switches to toggle when the valve is fully open or fully closed. The auxiliary switch position according to control signal (Y) is shown in the picture below.

CONTROL SIGNAL (Y)	RELAY KC1	RELAY KC2
0-0,5 V DC	KC1 to K2	KC2 to K3
0,5-9,5 V DC	KC1 to K1	KC2 to K3
9,5-10 V DC	KC1 to K1	KC2 to K4



## Diagnostic


The actuator is provided with a self diagnostic algorithm able to detect faulty conditions:

- stroke calibration out of range 5-60 mm;
- unexpected stall condition (e.g. valve stuck or extra stroke due to actuator link loose);
- voltage supply out of range.

These faulty conditions are signalled through the GREEN and RED LED on the electronic board blinking accordingly (see Diagnostic – Alarm Function Table).


#### **ASSEMBLING**

The actuator can be mounted with any orientation but never up-side down. When the fluid temperature exceed 120°C the actuator shall be mounted leaning 45°.

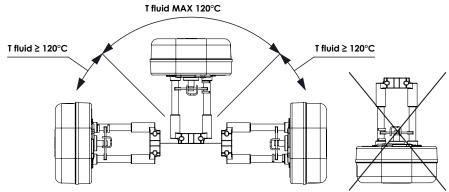

To mount the actuator on to a valve, position the valve stem to the bottom of its travel, slide the actuator onto the valve neck, adjusting with the manual override the screw jack position so the square nut on the valve spindle fits into the groove on the cross bar. Then slide the brace into the groove on the valve neck and secure the nuts.

www.ismacontrolli.com



See mounting instructions for full details (MVE\_DIM223).

#### **MAINTENANCE**

The actuator is maintenance-free.

### **ACCESSORIES**

**DMVE** End point auxiliary switches (electrical rate 24 V AC/DC, 4 A max)

GMVE Thermal insulation for MVE actuators \*
GMVES Thermal insulation for MVE.S actuators \*
KIT-P13.5 10 cable glands kit (nuts and gaskets include

KIT-P13.5 10 cable glands kit (nuts and gaskets included)KIT-T13.5 Kit 10 caps for cable glands hole (nuts and gaskets included)

248 Stem heater (suggested when the fluid temperature is below 0°C) \*

# **COMPATIBLE VALVES AND ACTUATORS**

iSMA CONTROLLI VALVES	MVE5XX	MVE5XXS
Current iSMA CONTROLLI valves (except for 2-3TGB.F PN16)	•	-
2-3TGB.F PN16	-	•
iSMA CONTROLLI valves with threaded M40 connections (except for VSB-VMB, VSB.F-VMB.F PN16)	with AG51	-
VSB-VMB, VSB.F-VMB.F PN16	with AG52	with AG63
OTHER MANUFATURERS VALVES	MVE5XX	MVE5XXS
Siemens *	with AG70-10 with AG70-14	-
Danfoss (VR/VF (S) models)	with AG60-07	-
TAC DN15-V298	with AG60-08	-
TAC DN15-V2XX/V3XX	with AG60-09	-
Honeywell **	with AG60-10	-
Airtek	with AG60-11 with AG60-12	-
Johnson Controls VB7816-2111	with AG66	-
Johnson Controls BM-3018-3300	with AG67	-
MUT MK DN50-150	with AG69	-
Tac Venta		-

<sup>\*</sup> AG70-10 for valves having stem Ø 10 mm, AG70-14 for valves having stem Ø 14 mm




<sup>\*</sup> It is not possible to install both thermal insulation (Gxxxx) and stem heaters.

<sup>\*\*</sup> valid for the following models: M6: V176A,B, V538C, 1/4": V5011A


Remove the cover screw with a screwdriver and then remove the cover as shown in the picture beside.

The actuator is equipped with a 8 poles removable terminal block; the each pole of the plug is clearly marked and the same label are reported on the electronic board. Before powering up the actuator make sure the plug is properly connected to the board and the label on the plugs and on the board match.



Use PG13,5 cable gland (not supplied).

#### **TERMINAL BLOCK**




LABEL	DESCRIPTION	FUNCTION	CABLE TYPE	MAX. WIRE LENGTH	
L1	24 V AC/DC	Power supply	AWG 16 (min 1 mm² - max 1,5 mm²)	75 m	
Ln	0 V	Power Suppry	AVVG 10 (IIIII1   IIIIII1 - IIIIax 1,5 IIIII1)		
Υ	0-10 V DC	Modulating control input	ANG 20 (via 0.5 via) via 4.5 via)	200 m	
М	0 V (common)	Modulating control input	AWG 20 (min 0,5 mm <sup>2</sup> - max 1,5 mm <sup>2</sup> )	200 m	
Y1	Open	Floating control input	AWG 20 (min 0,5 mm² - max 1,5 mm²)	200 m	
Y2	Close	Floating Control Input	AVVG 20 (111111 0,5 111111 - 1111ax 1,5 111111-)	200111	
V+	16 V DC	Voltage output may 25 mA	ANAC 20 (min 0.5 mm² may 1.5 mm²)	200 m	
М	0 V (common)	Voltage output max 25 mA	AWG 20 (min 0,5 mm <sup>2</sup> - max 1,5 mm <sup>2</sup> )	200 m	
U	2-10 V DC	Feedback output signal	ANAC 20 (min 0.5 mm² may 1.5 mm²)	200 m	
М	0 V (common)	reeuback output signal	AWG 20 (min 0,5 mm <sup>2</sup> - max 1,5 mm <sup>2</sup> )	200111	

Note: To avoid damages to electronic components caused by the PCB bending, do not press too much while fixing the terminal block.


# Matching between MVE terminal block and others iSMA CONTROLLI actuators

1	2	3	4	5	SH500
L1	L2	М	V+	Υ	MVB5-MVL5-MDL5
G	G0	МХ	G1	X1	MVF-MVH5-MVL5-F
L1	LN	М	V+	Υ	MVE


### 3 point floating control (sink connection)



# Modulating control (0-10 V DC)



### 3 point floating control (source connection)



# N.B.: M and Ln signals are internally connected.


(\*) MVE contain a single half-wave rectifier power supply. They must not be powered with transformers that are used to power other devices using not isolated double half-wave rectifier power supply.

#### **DIP SWITCHES SETTINGS**

Set the DIP switches according to the tables here below. Power down and power up again the actuator or act on the manual override to be sure that settings will be recognized.

# **Factory settings**





DIP SWITCH	OFF	ON	
1	Direct Action  U = 2V U = 10V	Reverse Action  U= feedback  U = 10V U = 2V	
2	Modulating Control (MOD) (Input between Y [+] and M [-])	3 point floating (INC) ( Y1 open-extend , Y2 close-re- tract connected L1 or Ln if powered in Vac; if powe- red in Vdc connected necessarily to Ln )	
		Y1 Y2	
3	-	Selection of sequence mode, control range defined by DIP n. 5	
4	Modulating Control 0-10 V DC (DIP n. 2 OFF only)	Modulating Control 2-10 V DC (DIP n. 2 OFF only)	
5	Sequence Control 0-5 V DC with DIP n. 4 OFF only Sequence Control 2-6V DC with DIP n. 4 ON only (DIP n. 3 ON only)	Sequence Control 5-10 V DC with DIP n. 4 OFF only Sequence Control 6-10 V DC with DIP n. 4 ON only (DIP n. 3 ON only)	
6	Voltage Input Signal (input between Y [+] and M [-])	Current Input Signal 4-20 mA (input between Y [+] and M [-]). In this case DIP n. 4 must be set to ON.	
7	Automatic Calibration: the actuator updates the stroke range every time an unexpected mechanical stop is detected for at least 10 s	Manual Calibration: the actuator calibration is started moving the DIP from OFF to ON or vice versa. With DIP in ON in case of extra stroke or if an unexpected endpoint is detected, the actuator will never update the stroke	


www.ismacontrolli.com

	LEDS FROM ACT		ACTUATOR	ACTUATOR B	EHAVIOUR	TYPICAL TROUBLE	RESET
N°	BEHAVIOUR			AUTOMATIC CALIBRATION (DIP N. 7 OFF)	MANUAL CALIBRATION (DIP N. 7 ON)	SHOOTING CONDITION	PROCEDURE
1	RED ON	Valve stroke less than 5mm	Calibra- tion/first installation	The actuator pushes/pulls 2 times (unexpected stall) trying to remove the possible obstacle. After 2 tries an alarm is signalled and the actuator moves to initial position and does not respond to control signal. Stroke value is not updated because out of range	The actuator pushes/ pulls 2 times against en- dpoint during calibration and the actuator moves to the initial position and then it does not respond to the control signal. The actuator keeps the previous stroke	Valve with a stroke length lower than 5mm	Remove power and power up again
2	RED quick blinking + GREEN ON	Stroke longer than 60mm	Calibra- tion/first installation	The actuator exits the 60mm stroke range and it moves toward the new stroke limit signalling an anomaly. The actuator pushes/pulls 2 times against the new stroke limit, then it goes back to the initial position still signalling the anomaly until it is not within 60mm. The actuator does not calibrate the stroke after 10s (wrong range)	The actuator exits the 60mm stroke range and it moves toward the new stroke limit signalling an anomaly. The actuator pushes/pulls 2 times against the new stroke limit, then it goes back to the initial position still signalling the anomaly until it is not within 60mm. The actuator does not calibrate the stroke after 10s (wrong range)	Valve with a stroke len- gth longer than 60mm	Remove power and power up again
3	RED Quick Blinking	Unexpected stall within the calibra- ted stroke range	normal operation	The actuator tries 5 times against the new stall condition and then after 10s the actuator updates the new stroke length	The actuator tries 5 times against the new stall condition. At the end of the attempts the fault will be signalled. The actuator does not update the new stroke length, but after 60s makes other attempts to verify the stall condition	Valve stuck	Inverted control signal
4	RED Quick Blinking	Stroke longer than expected	Normal operation	The actuator moves toward the new stall condition with a lower speed; after 10s the actuator updates the new stroke value	The actuator moves toward the new stall condition with a lower speed; after 10s the actuator does not upda- te the new stroke value	Stem con- nection lo- ose or valve damaged	Inverted control signal
5	RED slow Blinking	Low Power Voltage	Normal operation	The actuator is still working but performance cannot be guaranteed	The actuator is still wor- king but performance cannot be guaranteed	1. Wrong transformer size 2. Unstable power	Correct Voltage Power
6	RED slow Blinking	High Power Voltage	Normal operation	The actuator is still working but performance cannot be guaranteed	The actuator is still wor- king but performance cannot be guaranteed	1. Wrong transformer size 2. Unstable power	Correct Voltage Power

# **STANDARD LEDS BEHAVIOR**

N°	LED	ACTUATOR STATUS		
1	GREEN ON	The actuator arrived at the extreme point of the stroke read		
2	GREEN BLINKING	The actuator arrived at the intermediate point of the stroke read		
3	RED GREEN BLINKING	The actuator is reading the stroke or it is going to initial position		
4	RED GREEN ON	Manual control ON, the actuators ignores the control signal. ATTENTION! The electronic board is electrically supplied		

# **DIMENSIONS** [mm]

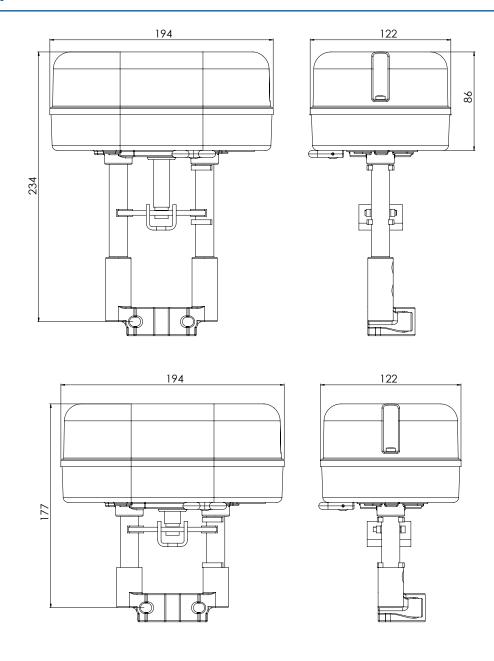

iSMA CONTROLLI S.p.A. - Via Carlo Levi 52, 16010 Sant'Olcese (GE) - Italy  $\mid$  support@ismacontrolli.com