

## **Technical data sheet**

NR24A-SZ

# Modulating rotary actuator for ball valves

- Torque motor 10 Nm
- Nominal voltage AC/DC 24 V
- Control modulating 0.5...10 V
- Position feedback 0.5...10 V



# **Technical data**

Electrical data	Newinglashers	
Electrical data	Nominal voltage	AC/DC 24 V
	Nominal voltage frequency	50/60 Hz
	Nominal voltage range	AC 19.228.8 V / DC 19.228.8 V
	Power consumption in operation	2.5 W
	Power consumption in rest position	0.4 W
	Power consumption for wire sizing	5 VA
	Connection supply / control	Cable 1 m, 4 x 0.75 mm <sup>2</sup>
	Parallel operation	Yes (note the performance data)
Functional data	Torque motor	10 Nm
	Operating range Y	0.510 V
	Input Impedance	100 kΩ
	Position feedback U	0.510 V
	Position feedback U note	Max. 1 mA
	Position accuracy	±5%
	Manual override	with push-button, can be locked
	Running time motor	90 s / 90°
	Sound power level, motor	35 dB(A)
	Position indication	Mechanically, pluggable
Safety	Protection class IEC/EN	III Safety Extra-Low Voltage (SELV)
	Protection class UL	UL Class 2 Supply
	Degree of protection IEC/EN	IP54
	Degree of protection NEMA/UL	NEMA 2
	Enclosure	UL Enclosure Type 2
	EMC	CE according to 2014/30/EU
	Certification IEC/EN	IEC/EN 60730-1 and IEC/EN 60730-2-14
	Certification UL	cULus according to UL60730-1A, UL60730-2- 14 and CAN/CSA E60730-1:02
	Certification UL note	The UL marking on the actuator depends on the production site, the device is UL-compliant in any case
	Mode of operation	Type 1
	Rated impulse voltage supply / control	0.8 kV
	Control pollution degree	3
	Ambient temperature	-3050°C
	Storage temperature	-4080°C
	Ambient humidity	Max. 95% r.H., non-condensing
	Servicing	maintenance-free
Weight	Weight	0.75 kg



Safety notes		
$\overline{\mathbb{M}}$	<ul> <li>This device has been designed for use in stationa conditioning systems and must not be used outsic especially in aircraft or in any other airborne mean</li> </ul>	le the specified field of application,
	<ul> <li>Outdoor application: only possible in case that no or aggressive gases interfere directly with the actu ambient conditions remain at any time within the t sheet.</li> </ul>	uator and that is ensured that the
	<ul> <li>Only authorised specialists may carry out installat institutional installation regulations must be completed</li> </ul>	
	<ul> <li>The switch for changing the direction of rotation m specialists. The direction of rotation must not in pa protection circuit.</li> </ul>	
	<ul> <li>The device may only be opened at the manufacture parts that can be replaced or repaired by the user</li> </ul>	
	Cables must not be removed from the device.	
	<ul> <li>The device contains electrical and electronic com of as household refuse. All locally valid regulation observed.</li> </ul>	
Product features		
Mode of operation	Mode of operation The actuator is connected with a standard modulating signal of 010 V and dr to the position defined by the positioning signal. Measuring voltage U serves for electrical display of the valve position 0.5100% and as slave control signal for actuators.	
<b>Simple direct mounting</b> Straightforward direct mounting on the ball valve with only one central screw assembly tool is integrated in the plug-in position indication. The mounting in relation to the ball valve can be selected in 90° steps.		dication. The mounting orientation
Manual override	Manual override with push-button possible (the gear is disengaged for as long as the button is pressed or remains locked).	
Adjustable angle of rotation	Adjustable angle of rotation with mechanical end stops.	
High functional reliability	The actuator is overload protected, requires no limit when the end stop is reached.	switches and automatically stops
Accessories		
	Description	Туре
Electrical accessories	Auxiliary switch 1 x SPDT add-on	S1A
	Auxiliary switch 2 x SPDT add-on	S2A

	Description	Type	
Electrical accessories	Auxiliary switch 1 x SPDT add-on	S1A	
	Auxiliary switch 2 x SPDT add-on	S2A	
	Feedback potentiometer 140 $\Omega$ add-on	P140A	
	Feedback potentiometer 200 $\Omega$ add-on	P200A	
	Feedback potentiometer 500 $\Omega$ add-on	P500A	
	Feedback potentiometer 1 k $\Omega$ add-on	P1000A	
	Feedback potentiometer 2.8 kΩ add-on	P2800A	
	Feedback potentiometer 5 k $\Omega$ add-on	P5000A	
	Feedback potentiometer 10 k $\Omega$ add-on	P10000A	
Electrical installation			
Notes	<ul> <li>Connection via safety isolating transformer.</li> <li>Parallel connection of other actuators possible. Observe the performance data.</li> <li>Direction of rotation switch is covered. Factory setting: Direction of rotation Y2.</li> </ul>		




# **Electrical installation**

#### Wiring diagrams


AC/DC 24 V, modulating

Override control (frost protection circuit)




## Cable colours: 1 = black 2 = red 3 = white


5 = orange



### **Dimensions** [mm]

#### **Dimensional drawings**

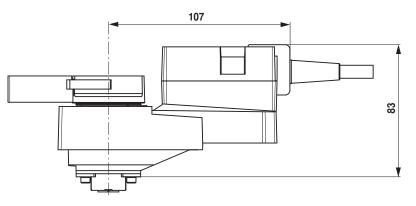

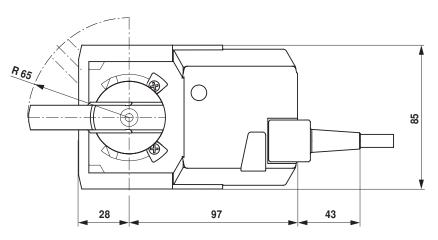

## **Further documentation**

- The complete product range for water applications
- · Data sheets for ball valves
- · Installation instructions for actuators and/or ball valves
- · General notes for project planning